




INSUGLAZE®

Insuglaze is an insulated glazing panel based on Lamina, an external high pressure laminate and Styrofoam an extruded polystyrene

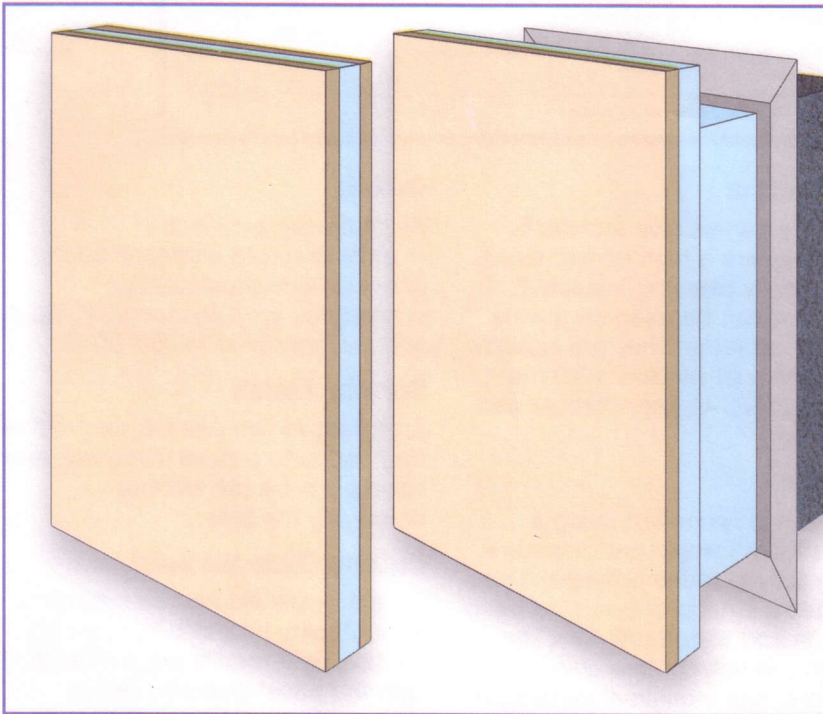

Physical Properties

- **Size:**
Max. 2800 x 1850 mm
- **Overall Thickness:**
20 mm to 100 mm
- **Edge Thickness:**
To suit glazing system
- **Lamina Thickness:**
3 mm
- **Thermal Conductivity:**
Styrofoam 0.027 w/mk
- **Weight:**
5 kg/m² to 9 kg/m²
- **Colours:**
A separate leaflet is available with our standard colours. These are held in stock for a rapid delivery service. Other colours are available on request.

Benefits

- **Smooth matt colour**
- **Wide choice of colours**
- **Ten year colour stability**
- **Good scratch and impact resistance**
- **Lamina Class 'O'**
- **Low maintenance**
- **Thermally efficient**
- **Resistant to moisture**

PANEL
SYSTEMS